


Rev 2.0 - MAJOR CHANGE FROM 1.0:
 1. Apply RX Mods
 2. Auto band detection R18
 3. Optional Bluetooth Module U5*
 4. TCXO Mod to U2 (not shown)
 5. Audio Cable Adapter (not shown)

TITLE: Arduino Digital Xcvr - Superhet		REV: 2.0
Company: CRKits.COM		Sheet: 1/1
Date: 2023-04-11		Drawn By:



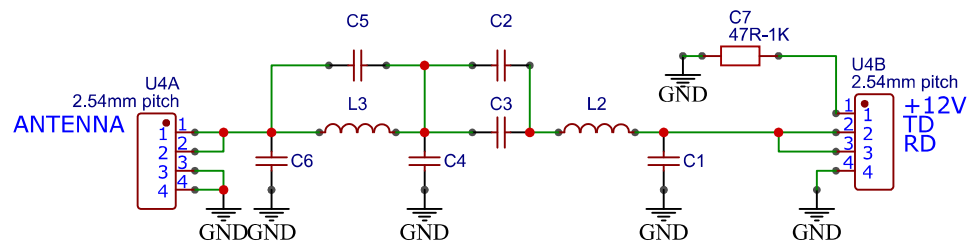

LPF BAND MODULE

Band	C1	C2	C3	C4	C5	C6	C7	L1	L2	L3
40m	150	1000	NC	1000	300	1000	1k Ω	NC	15T/RED	10T/RED
30m	100	680	NC	680	220	680	680 Ω	NC	12T/RED	8T/RED
20m	68	470	NC	470	150	470	470 Ω	NC	10T/RED	7T/RED
17m	Share 15m band filter									
15m	68	330	NC	330	100	330	220 Ω	NC	11T/YELLOW	7T/YELLOW
12m	Share 10m band filter									
10m	39	270	NC	270	68	270	47 Ω	NC	9T/YELLOW	6T/YELLOW

Unit: pF by default

TITLE:

ADX-S V2 LPF BAND FILTER

REV: 2.0

嘉立创EDA

Company: CRKits.COM

Sheet: 1/1

Date: 2024-04-11 Drawn By: